

# CA3

**LOW INTENSITY AVIATION OBSTACLE LIGHTS**  
**type A end type B**  
**DC or AC power supply**  
**with or without built in controller**

*THE EQUIPMENT IS DESIGNED FOR INSTALLATION ON HIGH BUILDINGS, TOWERS, PILLARS, CHIMNEYS ETC., WHICH SHOULD BE MARKED AS OBSTACLES FOR AVIATION, ACCORDING TO THE ICAO REQUIREMENTS.*





# CA3

## TECHNICAL CHARACTERISTICS

|                        |  |
|------------------------|--|
| Luminous intensity:    | >10 cd / >32 cd                            |
| Power consumption:     | 3 W / 8 W                                  |
| Light source:          | LED  |
| Emitted light colour:  | red  |
| Approx life time:      | 100 000 hours                              |
| Power supply:          | 12, 24 or 48 Vdc<br>85 ÷ 265 Vac; 50/60 Hz |
| Operating temperature: | -50° C to 55° C                            |
| Overall dimensions:    | 300 x 305 x 73 mm                          |
| Weight:                | 1.450 kg                                   |
| IP degree:             | IP66                                       |

### Mechanical construction

|                    |   |
|--------------------|---|
| Type of material:  | Stainless steel and Aluminium alloy                         |
| Installation Mode: | horizontal, vertical,<br>on pillar from ø20 mm up to ø40 mm |

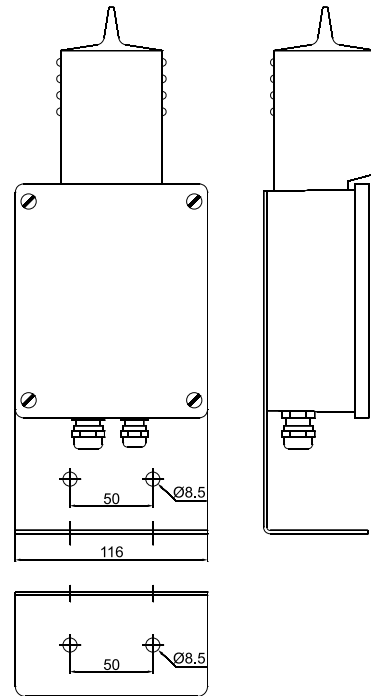

Installation bracket EL8.667.018  
for fixing the equipment to vertical  
or horizontal tube

## ORDERING CA3

