

SM 60T

LED TUNNEL LIGHT

WORLDWIDE POWERED

ACTIVE POWER FACTOR CORRECTION (PFC)

LEDs – 160 LM/W


SM 60T

- HIGH ENERGY EFFICIENCY
- NO MAINTENANCE COSTS
- LONG LIFECYCLE
- HIGH QUALITY AREA ILLUMINATION
- ERGONOMICAL – CLOSE TO NATURAL LIGHT
- ECOLOGICAL – MERCURY AND LEAD FREE

False Colours

illuminances

<input type="text" value="88.00"/>	88.00 lx
<input type="text" value="77.00"/>	77.00 lx
<input type="text" value="66.00"/>	66.00 lx
<input type="text" value="55.00"/>	55.00 lx
<input type="text" value="44.00"/>	44.00 lx
<input type="text" value="33.00"/>	33.00 lx
<input type="text" value="22.00"/>	22.00 lx
<input type="text" value="11.00"/>	11.00 lx
<input type="text" value="0.00"/>	0.00 lx

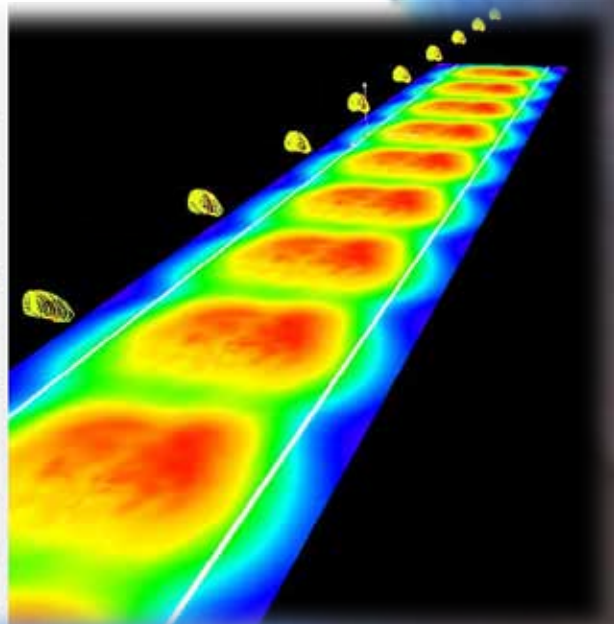

SM60T

SPECIFICATIONS

AC Input Voltage	90 ÷ 305 V AC
DC Input Voltage	127 ÷ 431 V DC
Mains Frequency	47 ÷ 63 Hz
Power Factor (PF) at 230 V	min 95 %
Power Factor (PF) at 115 V	min 98 %
LED Power Dissipation	57.6 W
Power Efficiency	90 %
Total Power Dissipation	63 W
LED Light Output	160 lm/W
Current Efficiency	81 %
LED Luminous Flux	7 394 lm
Junction Temperature at Ta = 25°C	70°C
Thermal Efficiency	91 %
Lens Efficiency	92 %
Real Luminaire Efficacy (LER)	98 lm/W
Color Rendering Index (CRI)	65 ÷ 80
Real Lamp Luminous Flux for:	
Cool White (CRI 65)	6 190 lm
Neutral White (CRI 75)	5 740 lm
Warm White (CRI 80)	4 860 lm
Zero Light Pollution	0 cd at 90°
Operating Temperature	-40° ÷ +45°C
Operating Humidity	10 ÷ 95 % RH
Lifespan L70	> 160 000 h
Ingress protection rating	IP 65
Electrical Safety Class	Class II
Marine Grade Aluminium Alloy Body	
Polycarbonate optical cover	optional
Dimensions	390 x 180 x 120 mm
Weight	3.5 kg



SM60T Application

Tunnel 2 lanes x 3,5 m L = 7 m; H = 5 m

C E EN61000-6-3:1997, EN61000-6-1:1997
Quality Assurance ISO 9001:2000; AQAP 2110



AURA Network Corporation Ltd.
77 Goulden House, Bullen Street,
London SW11 3HQ, England, UK

T: +44 (0) 8450556303 M: +44 (0) 7947863888
T: +44 (0) 8450556305 E: welcome@auracorporation.net
F: +44 (0) 8458331067 www.auracorporation.net